



“my
Reference,”

CREATION 70

CLIC

Gerflor[®]
theflooringgroup




CREATION 70

CLIC

214 x 1239 mm

242 x 1461 mm

391 x 729 mm



PUR+ MATT



Easy maintenance

4D DESIGN

MATT SURFACE




Natural look

CRISTAL WEAR LAYER



High definition design & color

STRUCTURED EMOSS & BEVEL



Ultra realistic surface

2M PATTERN DESIGN

Wide variety of planks or tiles

DUO CORE TECHNOLOGY

1 RESILIENT COMFORT CORE




Noise absorption



Soft underfoot

2 RIGID CORE WITH FIBER GLASS VEIL



The best stability



No adhesive




Renovation ceramic 4 mm joint

CLIC REVOLUTION 100% VERTICAL



30% Faster



Durable clic system



Heavy load resistance



Waterproof joints



Easy to change a plank

CLIC REVOLUTION EASY TO INSTALL WITH 100% VERTICAL CLIC



30% faster 

Waterproof joints



Easy to change a plank



Heavy load resistance



BREAK
120 000
CYCLES

CLIC
REVOLUTION

5X
MORE
RESISTANT!




BREAK
25 000
CYCLES

COMPETITOR A




Castor Chair Test

Durable clic system



CLIC
REVOLUTION





5X MORE
RESISTANT!

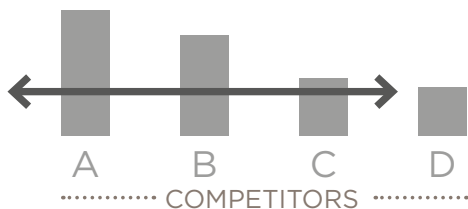

Locking Strength Test





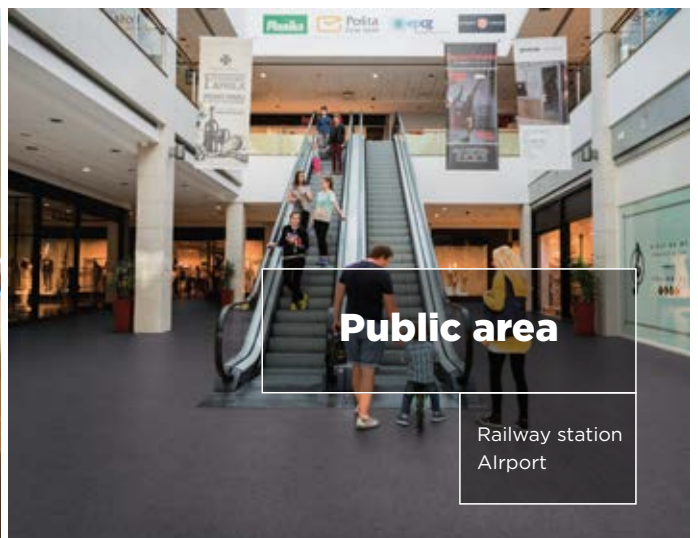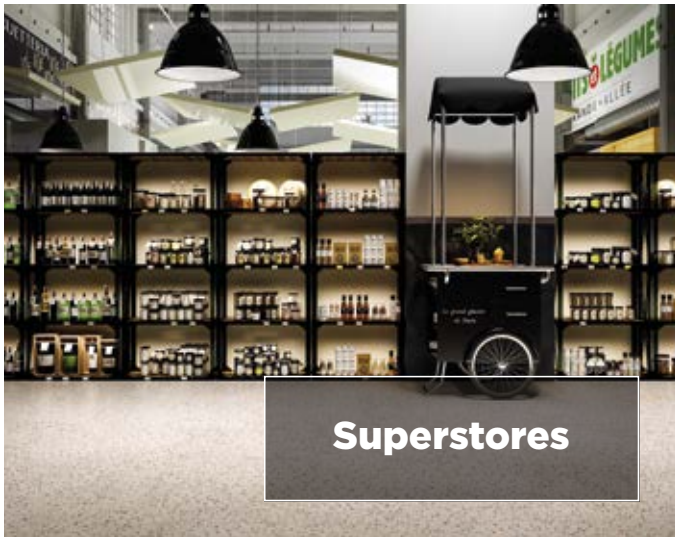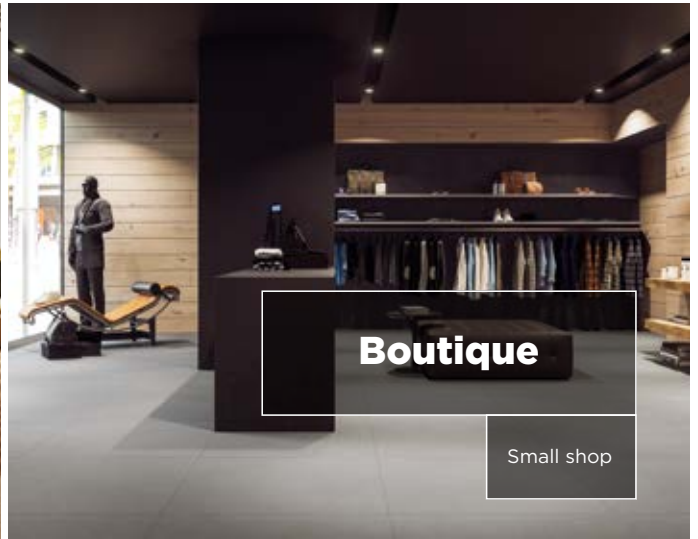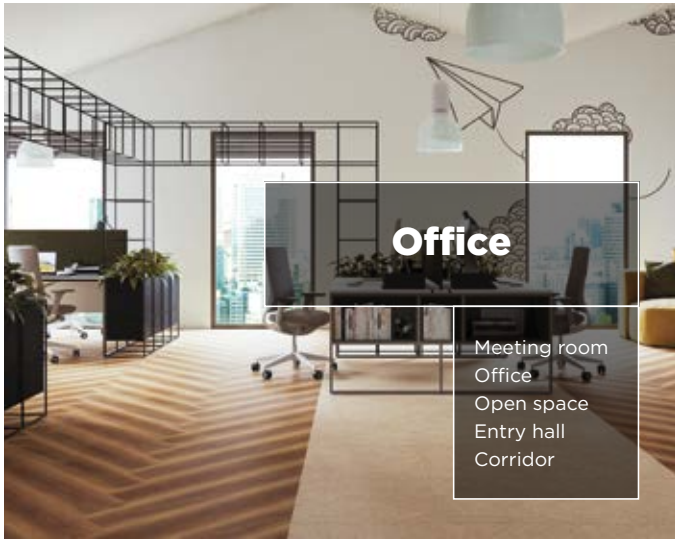














CREATION 70

ONE SOLUTION FOR EVERY MARKET APPLICATION



CREATION 70

3 CONSTRUCTIONS TO MATCH YOUR NEEDS

 GLUE DOWN 2.5 mm / 0.7 mm	 CLIC - REVOLUTION 6 mm / 0.7 mm	 LOOSELAY 6 mm / 0.7 mm
 <p>Permanent adhesive installation</p>  <p>Ideal installation on new construction & heavy refurbishment</p>  <p>Mix & match</p>  <p>XL planks</p>	 <p>Free adhesive installation</p>  <p>Fast and easy renovation Ceramic joint < 4 mm / 1 mm</p>  <p>Replacement one plank or tile</p>  <p>Watertight joint</p>  <p>Acoustic underlay</p>  <p>XL planks</p>	 <p>Removable installation using pressure sensitive adhesive</p>  <p>Fast and easy renovation Ceramic joint < 5 mm / 2 mm</p>  <p>Replacement one plank or tile</p>  <p>Ideal installation on raised access floors</p>  <p>Mix & match</p>  <p>XL square tile</p>
<p>70 DESIGN COLORS</p>	<p>36 DESIGN COLORS</p>	<p>21 DESIGN COLORS</p>

CREATION 70 CLIC
EXCLUSIVE DESIGNS



1049 Grace Bay Cream

214x1239 mm



0797 Cervino Oak Beige

242x1461 mm



0798 Cervino Oak Nature

242x1461 mm



1052 Muse Sand

214x1239 mm



GRACE BAY CREAM



ONKA NATURAL





1055 Onka Natural

242x1461 mm



1054 Onka Honey

242x1461 mm



0577 Albion

214x1239 mm



0359 Wild Oak

214x1239 mm



CREATION 70 CLIC
EXCLUSIVE DESIGNS



0538 Midwest

214x1239 mm



0358 Moon Island

214x1239 mm



0357 Portobello

214x1239 mm



0360 Deep Forest

214x1239 mm



MOON ISLAND



TOASTED WOOD CAFE



0545 Serena

214x1239 mm



0800 Toasted Wood Roadster

242x1461 mm



0799 Toasted Wood Cafe

242x1461 mm




1057 Onka Coffee

242x1461 mm



CREATION 70 CLIC
EXCLUSIVE DESIGNS

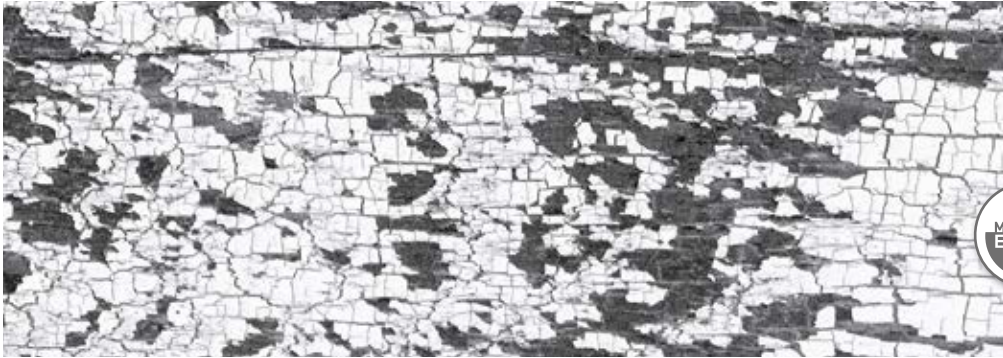

1050 Grace Bay Black

214x1239 mm



GRACE BAY BLACK



1056 Onka Pearl

242x1461 mm



ONKA PEARL



1051 Muse Smoked

214x1239 mm



1053 Toasted Wood Ash

242x1461 mm



Light




Medium



High



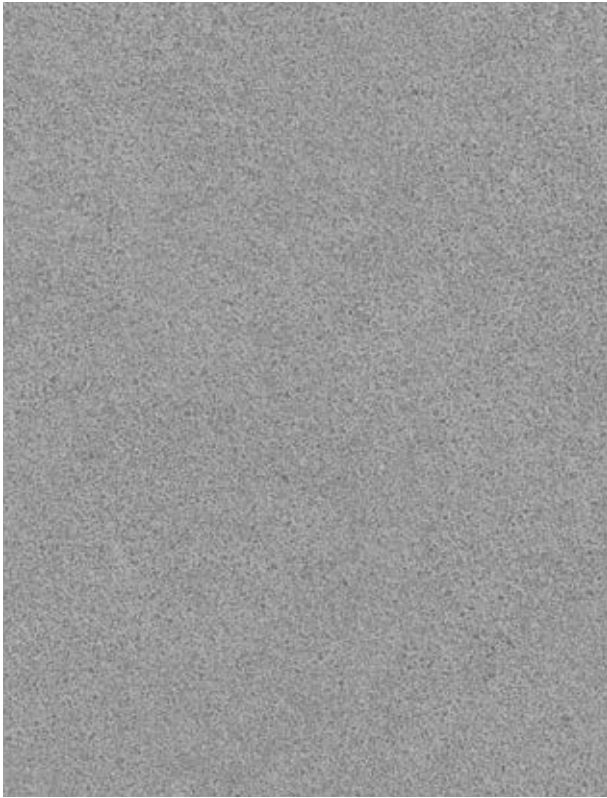

1061 Pure Concrete Medium

391x729 mm



1058 Gentleman Grey

391x729 mm



0085 Dock Grey

391x729 mm




1062 Pure Concrete Dark

391x729 mm





PURE CONCRETE MEDIUM

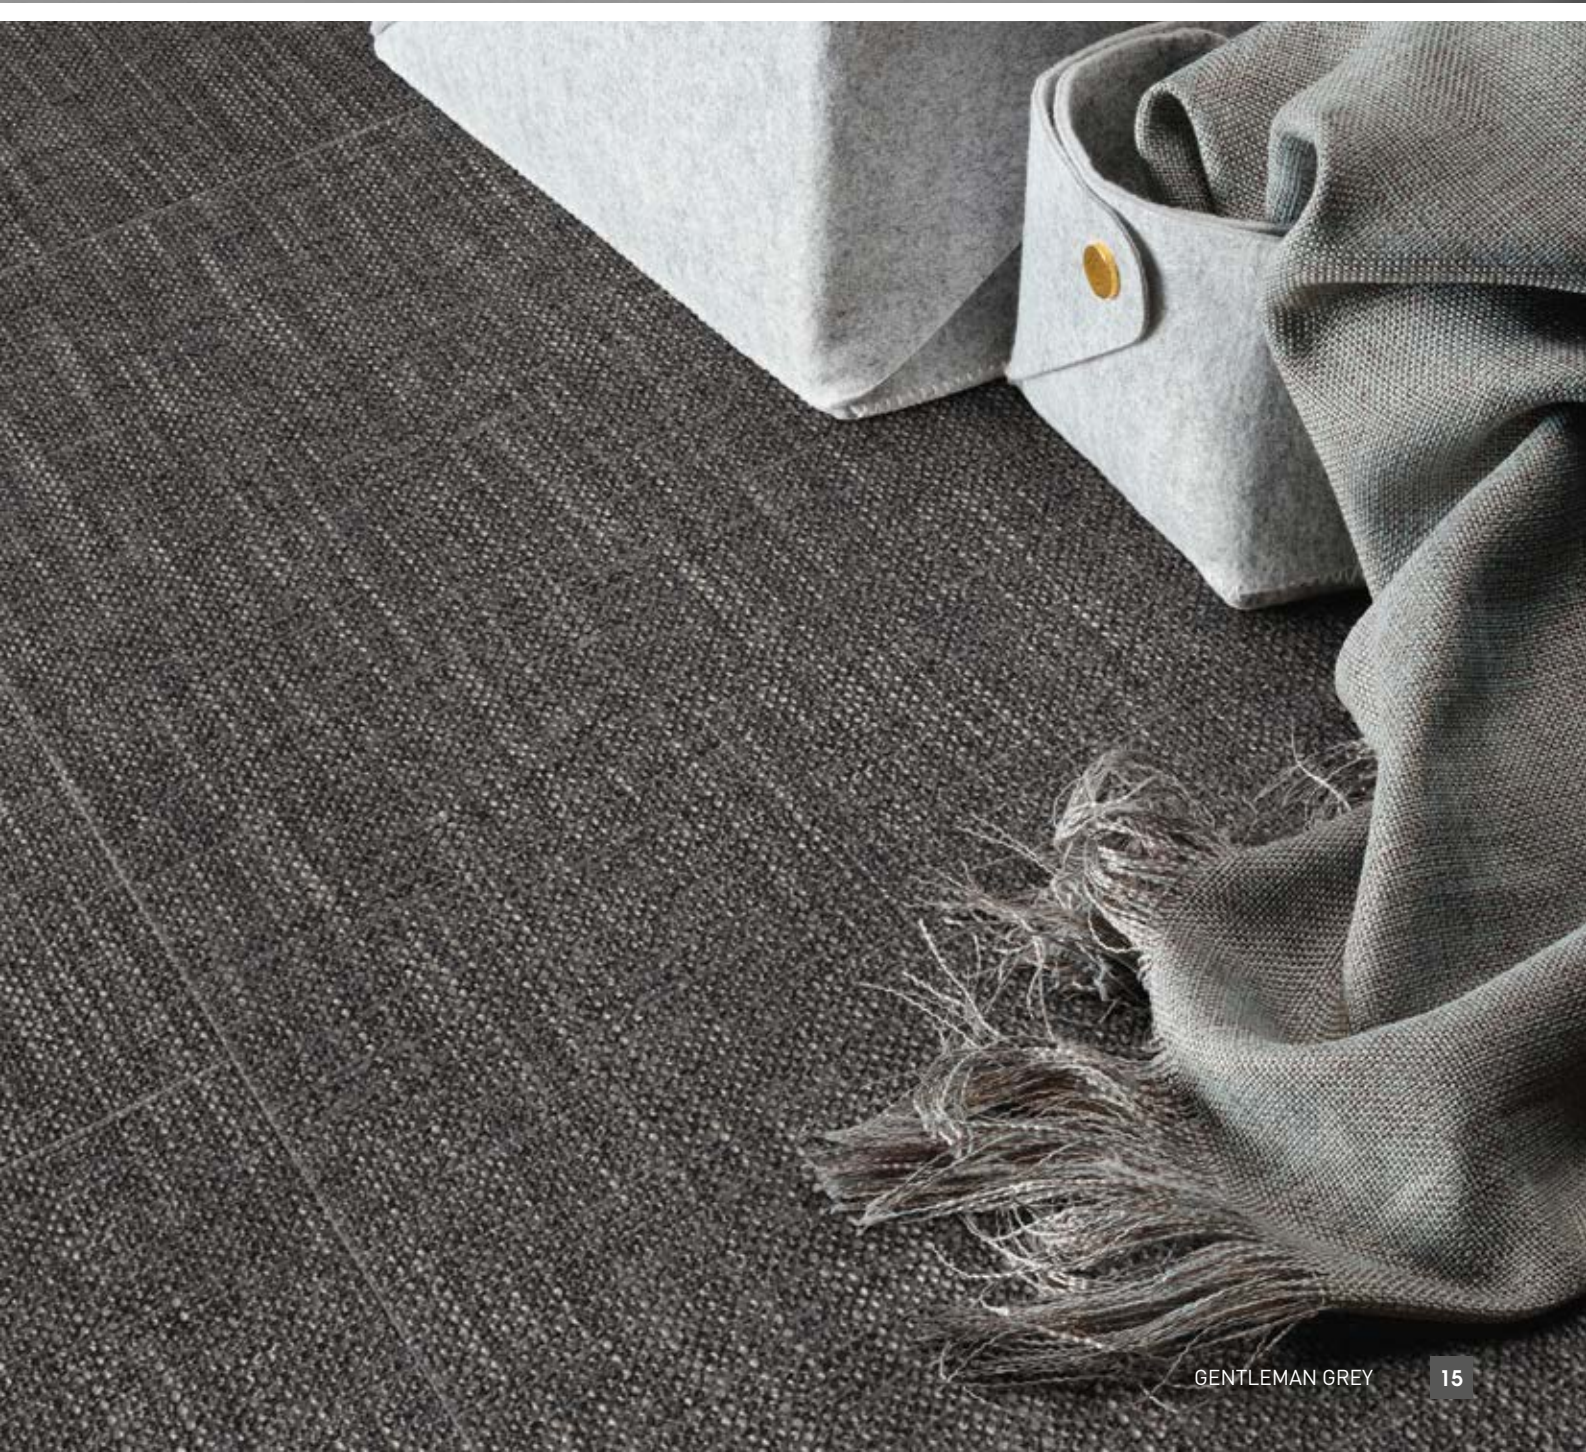

GENTLEMAN GREY



TERRAZZO OCRE





1066 Terrazzo Ocre

391x729 mm



1068 Etna Beige

391x729 mm



1063 Pure Concrete Beige

391x729 mm



0087 Dock Taupe

391x729 mm





1060 Pure Concrete Light

391x729 mm



1059 Secret Garden White

391x729 mm



1067 Terrazzo Nature

391x729 mm



1065 Prado Terracotta

391x729 mm





SECRET GARDEN WHITE




PRADO TERRACOTTA



OXYD PURE / OXYD IRON



CREATION 70 CLIC
EXCLUSIVE DESIGNS

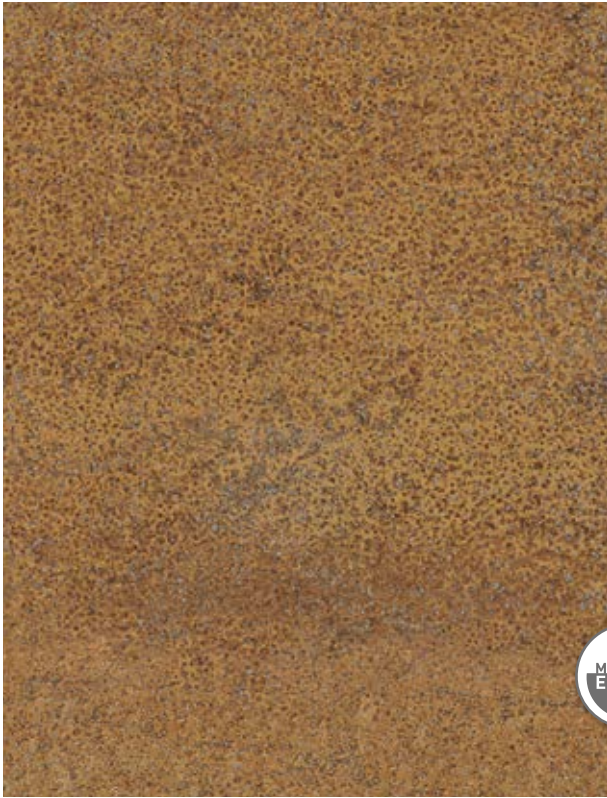

0088 Oxyd Pure

391x729 mm



0089 Oxyd Iron

391x729 mm



1064 Prado Green

391x729 mm



1069 Etna Dark

391x729 mm

DESIGN SHADE VARIATION:  Light  Medium  High






OXYD IRON



MIDWEST



PROFILES




RAMP 5-6MM
(aluminium)
Ref. 0505




FLAT THRESHOLD*
(aluminium)
Ref. 2570

DESIGN SKIRTINGS




Ref. 6086 + Color code
(Vinyl)



Ref. 5947 + Color code
(MDF)

COVERING SKIRTING



Ref. 2550*
(MDF)

White to paint or
matching design page 26



MATTING

MATTING

--- 2 TRAFFIC LEVELS --->



QUICK MAT TILE

Ref. 1725 + 1726 + 1727



KIT ESPLANADE 9000

Ref. 1700

----->

Suitable with Creation 70 Clic and Looselay

TOOLS




ADD-ON UNDERLAYERS



FOR MORE DETAILS

visit gerflor.com

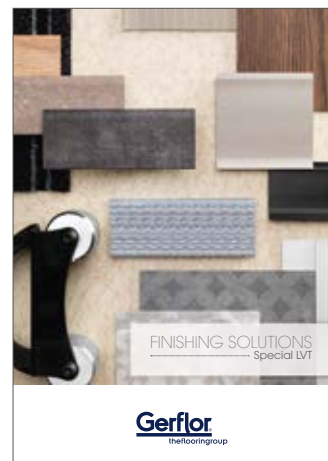

LVT Finishes Brochure

CREATION 70 CLIC

CROSS REFERENCES

SCANS	COLOR DESIGN	CLIC INSTALLATION	LOOSELAY INSTALLATION	GLUE DOWN INSTALLATION	DESIGN SKIRTING MATCHING DESIGN
	ALBION - 0577	214x1239 mm		184x1371 mm	S108
	CERVINO OAK BEIGE - 0797	242x1461 mm		230x1500 mm	S011
	CERVINO OAK NATURE - 0798	242x1461 mm		230x1500 mm	S109
	DEEP FOREST - 0360	214x1239 mm		152x914 mm	S110
	DOCK GREY - 0085	391x729 mm	914x914 mm	457x914 mm	S111
	DOCK TAUPE - 0087	391x729 mm	914x914 mm	457x914 mm	S020
	ETNA BEIGE - 1068	391x729 mm			WHITE
	ETNA DARK - 1069	391x729 mm			WHITE
	GENTLEMAN GREY - 1058	391x729 mm	600x600 mm		WHITE
	GRACE BAY BLACK - 1050	214x1239 mm			WHITE
	GRACE BAY CREAM - 1049	214x1239 mm			WHITE
	MIDWEST - 0538	214x1239 mm	229x1220 mm	152x914 mm	S039
	MOON ISLAND - 0358	214x1239 mm	229x1220 mm	152x914 mm	S034
	MUSE SAND - 1052	214x1239 mm			S117
	MUSE SMOKED - 1051	214x1239 mm			S118
	ONKA COFFEE - 1057	242x1461 mm			WHITE
	ONKA HONEY - 1054	242x1461 mm	229x1220 mm		S121
	ONKA NATURAL - 1055	242x1461 mm			S122
	ONKA PEARL - 1056	242x1461 mm			S120
	OXYD IRON - 0089	391x729 mm		457x914 mm	WHITE
	OXYD PURE - 0088	391x729 mm		457x914 mm	WHITE
	PORTOBELLO - 0357	214x1239 mm	229x1220 mm	152x914 mm	S053
	PRADO GREEN - 1064	391x729 mm			WHITE
	PRADO TERRACOTTA - 1065	391x729 mm			WHITE
	PURE CONCRETE BEIGE - 1063	391x729 mm			WHITE
	PURE CONCRETE DARK - 1062	391x729 mm	914x914 mm		WHITE
	PURE CONCRETE LIGHT - 1060	391x729 mm	914x914 mm		WHITE
	PURE CONCRETE MEDIUM - 1061	391x729 mm	914x914 mm		WHITE
	SECRET GARDEN WHITE - 1059	391x729 mm			WHITE
	SERENA - 0545	214x1239 mm		152x914 mm	S132
	TERRAZZO NATURE - 1067	391x729 mm			WHITE
	TERRAZZO OCRE - 1066	391x729 mm			WHITE
	TOASTED WOOD ASH - 1053	242x1461 mm			WHITE
	TOASTED WOOD CAFE - 0799	242x1461 mm		230x1500 mm	WHITE
	TOASTED WOOD ROADSTER - 0800	242x1461 mm		230x1500 mm	WHITE
	WILD OAK - 0359	214x1239 mm		152x914 mm	S075

WHITE = S001

DESCRIPTION / BESCHREIBUNG / BESCHRIJVING / DESCRIPTION / DESCRIPCIÓN / DESCRIÇÃO / DESCRIZIONE

Total Thickness / Gesamtdicke / Totale dikte / Épaisseur totale / Espesor total / Espessura total / Spessore totale	EN ISO 24346	mm	6.00		
	ASTM F386-02	inch	0.24		
Thickness of the wearlayer / Dicke der Nutzschrift / Dikte van de slijtlaag / Épaisseur couche d'usure / Espesor capa de uso / Espessura camada de desgaste / Spessore strato di usura	EN ISO 24340	mm	0.70		
	ASTM F410-02	inch	0.03		
Weight / Flächengewicht / Gewicht / Poids / Peso / Peso / Peso	EN ISO 23997	g/m ²	9850		
Size / Format / Afmetingen / Format / Dimensiones / Dimensões / Dimensioe	ISO 24342	mm	214x1239	242x1461	391x729
	ASTM F 536	inch	8.4"x48.7"	9.5"x57.5"	15.3"x28.7"

CLASSIFICATION / KLASSIFIKATION / CLASSIFICATIE / CLASSIFICATION / CLASIFICACIONES / CLASSIFICAÇÕES / CLASSIFICAZIONI

Norm/Product Specification / Produktnorm / Technische eigenschappen / Norme/Spécification produit / Normas / Normas / Norma prodotto	-	-	EN ISO 10582		
	ASTM F 1700-04	-	Class III Type B		
European Classification / Europäische Klassifizierung / Europese classificatie / Classement européen / Clasificación europea / Classificação Europeia / Europea	EN ISO 10874	Class	34 - 43		
Fire Rating / Brandverhalten / Brand classificatie / Classement Feu / Fuego / Fogo / Reazione al fuoco	EN 13 501-1	Class	Bfl-s1		
Static Electrical Propensity / Begehaufladung / Elektrische eigenschappen / Potentiel de charge / Comportamiento electrostático / Comportamento electrostático / Resistenza elettrica	EN 1815	kV	< 2		
Slip Resistance Wet / Rutschhemmung / Anti-slip / Glissance humide / Deslizamiento húmedo / Escorregamento húmido / Scivolosità umida ⁽¹⁾	DIN 51130 / BGR 181	Class	R10		

PERFORMANCES / TECHNISCHE EIGENSCHAFTEN / TESTRESULTAAT / PERFORMANCE / CUALIDADES TÉCNICAS / PERFORMANCES / CARATTERISTICHE TECNICHE

Wear Resistance / Verschleißverhalten / Slijtvastheid / Résistance à l'usure / Abrasión / Abrasão / Resistenza all'abrasione	EN 660.2	mm ³	≤ 2.0		
Wear Group / Verschleißgruppe / Groep slijtvasheid / Groupe d'abrasion / Grupo de abrasión / Grupo de abrasão / Gruppo di abrasione	QB 30	group	T		
Type Binder content / Bindemittelgehalt / Teneur en agent liant / Contenido en ligante / Conteúdo em ligante	ISO 10582	group	I		
Dimensional stability (norm) / Maßstabilität (norm) / Maatvastheid (norm) / Stabilité dimensionnelle (norme) / Estabilidad Dimensional (Exigencia) / Estabilidade dimensional (normalização) / Stabilità dimensionale (requisito normativo)	EN ISO 23999	%	≤ 0.15		
Dimensional stability (average measured value) / Maßstabilität [Durchschnittswert] / Stabilité dimensionnelle (valeur moyenne mesurée) / Maatvastheid [gemeten gemiddelde waarde] / Estabilidad Dimensional (Valor medido) / Estabilidade Dimensional (Valor medio) / Stabilità dimensionale (rilevata)	-	%	≤ 0.05		
Residual Indentation / Resteindruck / Indrukbelasting / Poinçonnement statique rémanent / Punzonamiento / Punçoamento / Impronta	EN ISO 24343-1	mm	≤ 0.10		
Impact sound insulation / Trittschallverbesserungsmaß / Geluidisolatie / Isolation acoustique bruits de chocs / Acústica / Isolamento acústico	EN ISO 717-2	dB	4		
Room Impact / Raumschall / Loopgeluid / Sonorité à la marche / Rumore al calpestio / Sonoridad en la pisada / Sonoridade ao andar	NF S 31074	dB	78		
Castor chair test / Stuhlrollenbeanspruchung / Rolweerstand bureaustoelen / Essai de la chaise à roulettes / Determinación del efecto de una silla con ruedas / Resistência a cadeiras de rodas / Resistenza al passaggio di sed (Type W)	ISO 4918	-	OK		
Thermal Conductivity / Wärmeleitfähigkeit / Thermische weerstand / Conductivité thermique / Conductividad térmica / Contutividade térmica / Resistenza termica / Värmeledningsmotstånd / Varmemotstånd	EN ISO 10456	W/(m.K)	0.25		
Colour Fastness / Lichtechtheit / Lichtechtheid / Solidité lumière / Resistencia a la luz / Estabilidade das cores / Solidità alla luce	EN 20 105 - B02	degree	> 6		
Surface Treatment / Oberflächenvergütung / Oppervlaktebehandling / Traitement de surface / Tratamiento de superficie / Tratamento de superfície	-	-	PUR+ Matt		
Chemical Products Resistance / Verhalten gegenüber Chemikalien / Chemische bestandigheid / Résistance aux produits chimiques / Resistencia a los productos químicos / Resistência aos produtos químicos / Resistenza ai prodotti chimici ⁽²⁾	EN ISO 26987	-	OK		

ENVIRONMENT/INDOOR AIR QUALITY / UMWELT/RAUMLUFTQUALITÄT / ENVIRONNEMENT/QUALITÉ DE L'AIR INTÉRIEUR / MEDIO AMBIENTE/CALIDAD INTERIOR DEL AIRE INTERIOR / MEIO AMBIENTE/QUALIDADE DO AR INTERIOR

TVOC after 28 days / TVOC (28 Tage) / TVOC (28 dagen) / TVOC après 28 jours / TVOC (28 dias) / TVOC (28 dias) / TVOC (28 giorni) / TVOC (28 dagar) / TVOC (28 dager)	ISO 16000-6	µg/m ³	< 10		
Certification / Zeugnis / Certification / Certificado / Certificação	-	-	Floorscore®		

CE MARKING / CE KENNZEICHNUNG / EG_CONFORMITEITSMERK / MARQUAGE CE / MARCA DE CONFORMIDAD CE / MARCA DE CONFORMIDADE CE / MARCATURA CE DI CONFORMITA

	EN 14041	-				
---	----------	---	---	---	---	---







(1) Ramp test with oil / Schiefe Ebene / Plan incliné avec huile

(2) Beständig gegenüber nicht färbenden alkoholhaltigen Handdesinfektionsmitteln, Haushaltschemikalien und verdünnten Säuren und Laugen bei kurzzeitiger Einwirkung.

PACKAGING

Product size (mm)	Tiles-planks / Box	Sqm / Box	Box weight (kg)	Pallet sizes w x l (m)	Sqm / Pallet	Pallet weight (kg)
214 x 1239	6	1.59	15.91	0.80 x 1.30	85.86	874.80
242 x 1461	5	1.77	17.68	0.80 x 1.50	84.96	864
391 x 729	5	1.43	14.25	0.80 x 1.50	85.80	876

CREATION 70 CLIC, A SUSTAINABLE CHOICE

 <p>REACH COMPOSITION 100% REACH Phthalate Free (except recycled content)</p>	 <p>INDOOR AIR QUALITY TVOC below detection level No Formaldehyde emission</p>	 <p>RECYCLABILITY Recycled content 55% 100% Recyclable</p>	 <p>INSTALLATION Clic: Adhesive free</p>	 <p>LCA Clic: Lowest Carbon Footprint CO₂ emissions/sqm 10 times lower than standard process</p>	 <p>WELLNESS Walking noise: 78 dB</p>
---	--	--	--	--	---

Visualize your reference



interiordesigner.gerflor.com

30 years experience
Since 1985

Manufacturer
3 LVT Factories

World Class Logistics
12 Logistics Hubs

Gerflor Design Centre
Exclusive Designs



“Serenity,,
Elodie - **End User**



“Time saving,,
Mika - **Installer**



“Unique Design,,
Pierre - **Architect**



“Confidence,,
Claire - **Store Manager**



“Reliability,,
Lucas - **Distributor**

That's why Gerflor is our **Reference**

Gerflor International
Tel: +33 (0)4 74 05 40 00
Fax: +33 (0)4 74 05 03 13
e-mail: gerflorcontract@gerflor.com
gerflor.com

Gerflor[®]
theflooringgroup