


ECO-FIT™ SYSTEM RENOVATION WORK – FREE-FLOATING

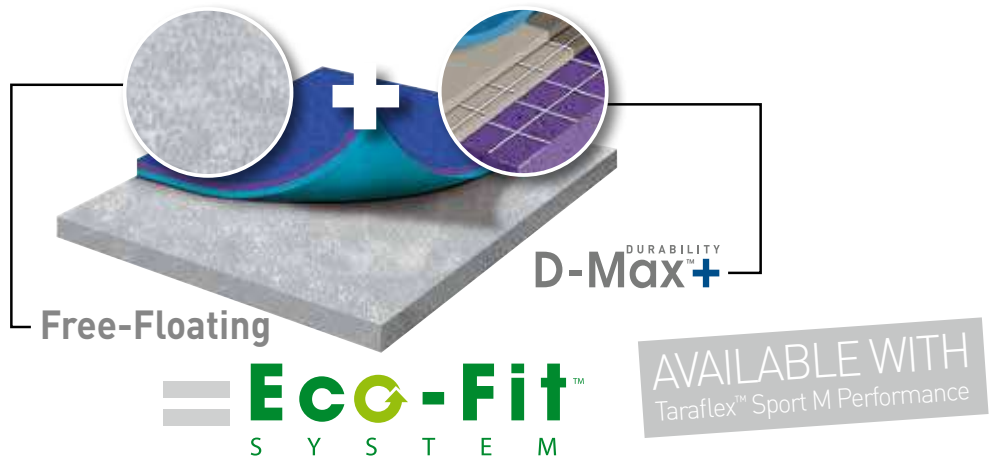

► **The free-floating Eco-Fit™ System** an installation method from Gerflor, ideal for renovation works.

A simple, quick and eco-friendly solution

- **Quicker and easier installation:** two installers laying the floor, will find that there is two days less work on a 1000m² sports hall, when compared with standard installations that need to be adhered to the floor with adhesive.
- **80% less adhesive** required, which means **reduced VOC emissions** for the installation
- Ease of repair during the material's life
- **End of life material recycling** is easy; no more tearing up screed when stripping the floors!
Eco-Fit™ System installation is fully integrated into Gerflor's eco-friendly program.




Eco-Fit System™: the main advantage of the double fibreglass grid

D-Max + with the double fibreglass grid strengthens the mechanical resistance of Taraflex™ products and provides outstanding durability of the floor when installed Eco-Fit™.

After 25 000 cycles under the castor chair (simulates aging of product), Taraflex™ products D-Max+ have a better mechanical resistance than other products on market.

MECHANICAL PROPERTIES (Modulus* N) NF T 54-103

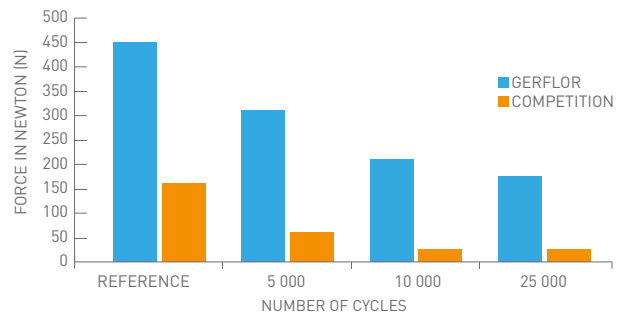

*Force needed to stretch the product of 1% from its initial shape

Installation criteria:

Moisture	No previous humidity issues
Flatness	< 6mm / 3m
Surface	Hydraulic concrete*

*for more information contact us