

FEATURES AND BENEFITS

Beneath its heady good looks, Gerflor Texline boasts an enviable list of practical features and benefits. Warm and soft underfoot, quiet and comfortable – even in high rise situations, waterproof both sides and quick and easy to install, Texline is the perfect choice for new homes, townhouses or renovations.



Warm and comfortable

Texline's soft, absorbent backing insulates against cold, bringing year round warmth and comfort to your home.



Acoustic comfort

Texline effectively reduces noise bringing quiet comfort to your home. Ideal for apartments, flats or corridors and recovering hard and noisy floors.



Easy to clean

The superior surface treatments create a barrier to prevent dust and dirt from penetrating the surface, allowing for easy maintenance.



Tough and durable

Texline is protected by the latest scuff, scratch and stain resistant surface treatments making it suitable for high traffic areas. Dogs, kids and cats are welcome in a Texline home.



Save money and time

Texline can be laid directly, without adhesives, over most existing floors for a fast and cost effective flooring solution. The innovative textile backing absorbs subfloor irregularities making it possible to transform areas covered in old tiles or noisy ceramics* (p16).



Waterproof from above and below

The anti-mildew and waterproof membrane prevents the transfer of mould to the surface, ideal for wet areas and damp concrete floors.



Environmentally friendly

Texline's backing is made with more than 95% recycled fibres and the product is 100% recyclable. The VOC rating is even lower than regulations demand ensuring a safe, environmentally friendly solution for every room in the home.


PATENTED INNOVATION

Texline is a revolutionary textile backed flooring that combines the warmth, comfort and quiet of carpet with the practical, hardwearing benefits of vinyl.



RECYCLING PROCESS

for fibres used in Gerflor products

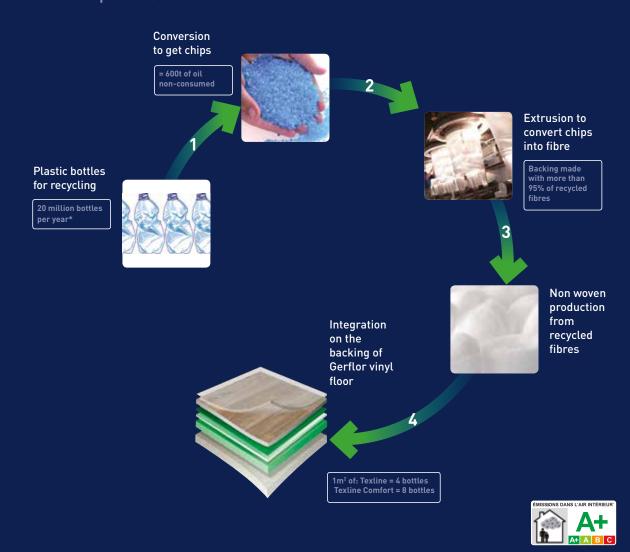

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure or for compensation for any other loss or damage. You are also entitled to have the goods repaired if the goods fail to be of acceptable quality and the failure does not amount to a major failure. For more detail call 1800 060 785 or visit www.gerflor.com.au

* Information on the emission level of indoor volatile organic compounds on a class scale from A+ (very low emissions) to C (high emissions).

TEXLINE PRO



COMMERCIAL COLLECTION

The stylish good looks of this new commercial quality collection are matched by its tough, hardwearing, non-slip surface that is designed to withstand the heaviest foot traffic. Texline Pro provides the ideal solution to meet both your aesthetic vision and the practical demands of a doctors surgery, dental practice or aged care facility. Designs reflect the latest trends in interior finishes including large format wood planks right through to pared back concrete and stone finishes.

DESCRIPTION	STANDARD	UNIT	
Width of rolls	EN 426	m	4
Total thickness	EN 428	mm	3.1
Wearlayer thickness	EN 429	mm	0.5
Slip resistance	AS4586:2013	group	R10
Sound insulation	EN ISO 717-2	dβ	16



















ELEGANT BROWN 1988



ELEGANT CLEAR 1989



DAMASCO BLANC 1997



DAMASCO TAUPE 2000



DAMASCO DARK 1998



DAMASCO PERLE 1999



BROOKLYN BROWN 1786



BROOKLYN BEIGE 1785



WALDEN BLOND 1985



WALDEN BROWN 1984



KARONGA CREMA 1657



KARONGA GRIGIO 1769



TIMBER HONEY 1819



TIMBER CLEAR 0720



TIMBER DARK GREY 1818



TEXLINE HQR



PREMIUM COLLECTION

The stylish good looks of this new collection are only matched in their appeal by its tough, hardwearing, non-slip layers designed to withstand the heaviest foot traffic. An ideal solution that meets both your aesthetic needs and practical demands, this beautiful flooring range features contemporary tile designs right through to artistic concrete patterns.

DESCRIPTION	STANDARD	UNIT	
Width of rolls	EN 426	m	4
Total thickness	EN 428	mm	3.1
Wearlayer thickness	EN 429	mm	0.4
Slip resistance	AS4586:2013	group	R10
Sound insulation	EN ISO 717-2	dβ	16



















DIAMOND CREAM



DIAMOND BLUE 1995



MODENA NATUREL 1991



MODENA GREY 2001



HARLEM DARK 1787



HARLEM LIGHT GREY 1788



MEDLEY PEARL 1982



MEDLEY BROWN 1990



CASTLE BROWN 1846



CASTLE BLOND 1802



CASTLE CLEAR 1918



CASTLE BLOND 1802



MACCHIATO NATUREL 2003



MACCHIATO BROWN 2004



LODGE MILK 1439



TEXLINE COMFORT



PREMIUM COLLECTION

Underfoot comfort reaches new heights with this luxurious Texline Comfort collection. Sun drenched timber looks draw inspiration from nature and the timeless beauty of stone and concrete are celebrated in hues that will complement every contemporary interior design space. Intricate designs add complexity and intrigue over a palette of on trend colours. Geometric influences celebrate a modern take on the classic ceramic and stone patterns.

DESCRIPTION	STANDARD	UNIT	
Width of rolls	EN 426	m	4
Total thickness	EN 428	mm	4
Wearlayer thickness	EN 429	mm	0.35
Slip resistance	AS4586:2013	group	R10
Sound insulation	EN ISO 717-2	dβ	20



















LEONE GREY 2071



LEONE LIGHT GREY 2072



LISBOA BLACK & WHITE 2073





EMPIRE DARK GREY 2069



EMPIRE WHITE 2070



EMPIRE CLASSIC 2090



EMPIRE PERLE 2091



NEWPORT HONEY 1556



MANDALA BLACK 2075



MANDALA BLUE 2093



MANDALA CLEAR 2076



TEXLINE ESSENCE



PREMIUM COLLECTION

Make a bold statement or provide a neutral foundation for your décor – the choice is yours when you select your flooring from the stunning Texline Essence collection. Geometric designs inspired by Mediterranean tiles sit alongside layered textured surfaces to offer distinctive contemporary choices. Seven wide plank timber designs and colours combine with two herringbone parquetry looks to add natural beauty to any room in your home.

DESCRIPTION	STANDARD	UNIT	
Width of rolls	EN 426	m	4
Total thickness	EN 428	mm	2.9
Wearlayer thickness	EN 429	mm	0.3
Slip resistance	AS4586:2013	group	R10
Sound insulation	EN ISO 717-2	dβ	16



















CORODOBA GREY 2078



CORDOBA MARINE 2136



NOMA CLEAR 1727



NOMA MIEL 0476



SAVANNAH NATUREL 2139



SAVANNAH BLOND 2138



SAVANNAH GREY 2140



LORCA PEARL 2147



PARIS WHITE 2083



PARIS BLOND 2086



CONFETTI BEIGE 2144



CONFETTI DARK 2146



SHERWOOD BROWN 2015



SHERWOOD CLEAR 2012



LOFTEX

MODERN ELEGANCE

The new Loftex collection punches above its weight in the value for money stakes. Sophisticated timber and tile designs sit on the surface of 2.5mm thick, hard wearing textile backed range that can be loose laid in an area up to 35 sq metres. Install it over old ceramic tiles or worn timber to completely transform your décor.

DESCRIPTION	STANDARD	UNIT	
Width of rolls	EN 426	m	4
Total thickness	EN 428	mm	2.5
Wearlayer thickness	EN 429	mm	0.30
Slip resistance	AS4586:2013	group	R9
Sound insulation	EN ISO 717-2	dβ	15









ORIGIN LIGHT GREY



BOUTIC NATUREL







OPERA GREY 2172



OPERA NATUREL 2155



BOUTIC NATUREL 2171



BOUTIC MEDIUM 2168



BOUTIC LIGHT GREY 2169



NEVADA LIGHT GREY 2164



LUX NATURAL 2166



LUX BLOND 2167



ORIGIN CREAM 2173



ORIGIN LIGHT GREY 2174



PRIMETEX CLASSIC

CLASSIC COLLECTION

White, taupe, grey and natural timber – the perfect answers to your quest for a classic contemporary look. Choose from tile and plank designs or allow the stunning all over designs lay the foundations for your inspired décor. Permanent, glued installation is recommended for this range.

DESCRIPTION	STANDARD	UNIT	
Width of rolls	EN 426	m	4
Total thickness	EN 428	mm	2
Wearlayer thickness	EN 429	mm	0.25
Slip resistance	AS4586:2013	group	R9/10
Sound insulation	EN ISO 717-2	dβ	15









DUNE WHITE









GRAVEL BEIGE 0711



GRAVEL GREY 0712



CAJOU GREY 1151



CAJOU HONEY 1236



COLARADO DARK GREY 1980



COLARADO BROWN 1825



TIMBER CLEAR 0720



TIMBER MEDIUM 0721



PLAYA WHITE 1193



VICTORIA LIGHT 1547



DUNE WHITE 1588



HARLEM TAUPE 1845



PRIMETEX ACCENT

TREND COLLECTION

Sophisticated blue tones, edgy metallic designs and soothing natural timber looks bring choice and design flair to the Primetex Accent range. This versatile range is designed to meet the everyday needs of modern living. Comfortable, quiet and warm underfoot, Primetex Accent is also tough enough to withstand the demands of the busiest household.

DESCRIPTION	STANDARD	UNIT	
Width of rolls	EN 426	m	4
Total thickness	EN 428	mm	2
Wearlayer thickness	EN 429	mm	0.25
Slip resistance	AS4586:2013	group	R9/10
Sound insulation	EN ISO 717-2	dВ	15



















COGNAC PEARL 2006



COGNAC BLOND 2007



COGNAC BLANC 2068



COGNAC GREY 2016



BACARA ANDOISE 2059



BACARA BLEU 2057



HANDMADE SILVER GREY 2055



HANDMADE BLUE 2054



PRISME GREY 2062



PRISME BLOND 2061



FISHERMEN OCEAN 1667



INSTALLATION

Gerflor Texline is the ultimate loose lay flooring solution. The exclusive textile backing is made from recycled plastic bottles so it is resistant to moisture and ideal for wet areas as well as general use. Texline is quick and easy to install over most existing subfloors with minimal preparation.

Select the best Texline product for your interior application:

- Texline Essence and Comfort are for domestic use only
- Texline HQR suits domestic and light commercial uses.

Texline can be loose laid directly over most subfloors*:

- Wooden floorboards
- Ceramic tiles
- Concrete slab.
- * Provided there is no height variation and irregularities, joins or gaps don't exceed 3mm width and 2mm depth. Best results will be enjoyed using a trained installer and following Gerflor's installation instructions. Texline cannot be installed over carpet.

Gerflor's Primetex and Solidtex ranges have similar features and benefits to Texline but are not recommended for loose lay. These products should be permanently glued to satisfy warranty conditions and ensure optimal performance.

MAINTENANCE

- For regular maintenance use a vacuum cleaner, a soft broom or a damp mop.
- To clean Texline use a neutral floor cleaning detergent with water and rinse thoroughly.
- Most stains can be removed using a damp cloth with Eucalyptus Oil. Do not use solvents or ammonia based cleaners.
- To keep your Texline floor looking beautiful do not allow waxed or rubber products to have prolonged contact with your floor. Replace wax or rubber castors on the end of furniture legs with plastic or nylon ends or protect the floor with felt pads.

To download the full Installation / Maintenance Guide and Texline FAQ factsheet visit gerflor.com.au





